

High performance liquid-solids separation systems



Exclusive internal acceleration creates maximum performance to achieve maximum protection of fluid handling systems from unwanted solids (see illustration inside for details). Its advanced & patented design, building upon the performance LAKOS is known for, now also removes 50% more of the finer solids (< 40 microns), resulting in higher aggregate solids removal. Independently tested. Proven superior for today's demanding filtration requirements. For settleable solids only.

Trouble-free operation & advanced purging/solids-handling concepts keep fluids clean and concentrate separated solids

No screens or filter elements to clean or replace; no messy servicing routines

No backwashing; zero fluid loss options

Low & steady pressure loss

Choice of profiles to accommodate space/piping limitations

Swirlax internal accelerating slots for optimum solids-removal performance; patented

Vortube for enhanced solids separation/collection; patented

Grooved inlet/outlet connections for easy installation; optional flanged connections also available

In-line inlet/outlet configuration for simplified piping (low-profile models only)

Unishell construction for easy installation

Optional material construction & ASME code



Flow range:
4 - 12,750 U.S. gpm
(1 - 2895 m³/hr) per unit

Maximum standard pressure rating:
150 psi (10.3 bar)
at 180°F (82°C)



JPL Series includes inlet/outlet pressure gauges with petcock valves.



Also available with weld-on flanges. See page 3 for other details.

How-it-Works Illustration

Model Specifications

Installation & Operating Instructions

Maintenance & Purging


Engineering Specifications




LAKOS is a proud member of the U.S. Green Building Council

How It Works

Automatic Purging

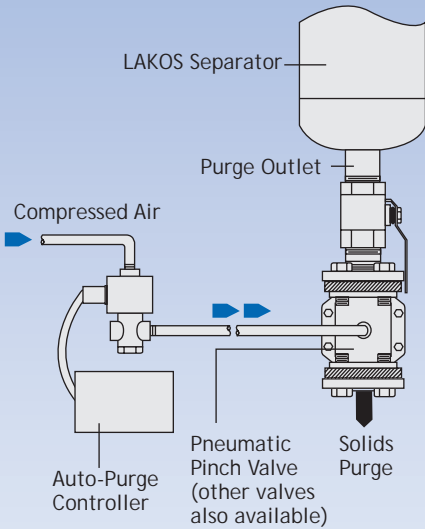


Solids Handling Options

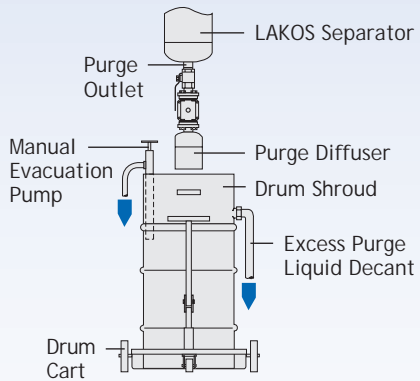


Systems also available with a tilt-style hopper.

Lakos Separators are manufactured and sold under one or more of the following U.S. Patents:
 3,289,608; 3,512,651; 3,568,837;
 3,701,425; 3,947,364; 3,963,073;
 4,027,481; 4,120,795; 4,123,800;
 4,140,638; 4,147,630; 4,148,735;
 4,305,825; 4,555,333; 5,320,747;
 5,338,341; 5,368,735; 5,425,876;
 5,571,416; 5,578,203; 5,622,545;
 5,653,874; 5,894,995; 6,090,276;
 6,143,175; 6,167,960; 6,202,543;
 Des. 327,693; and corresponding foreign patents, including 600 12 329.4-08 (Germany) and EP 1 198 276 B1 (EU); other U.S. and foreign patents pending.

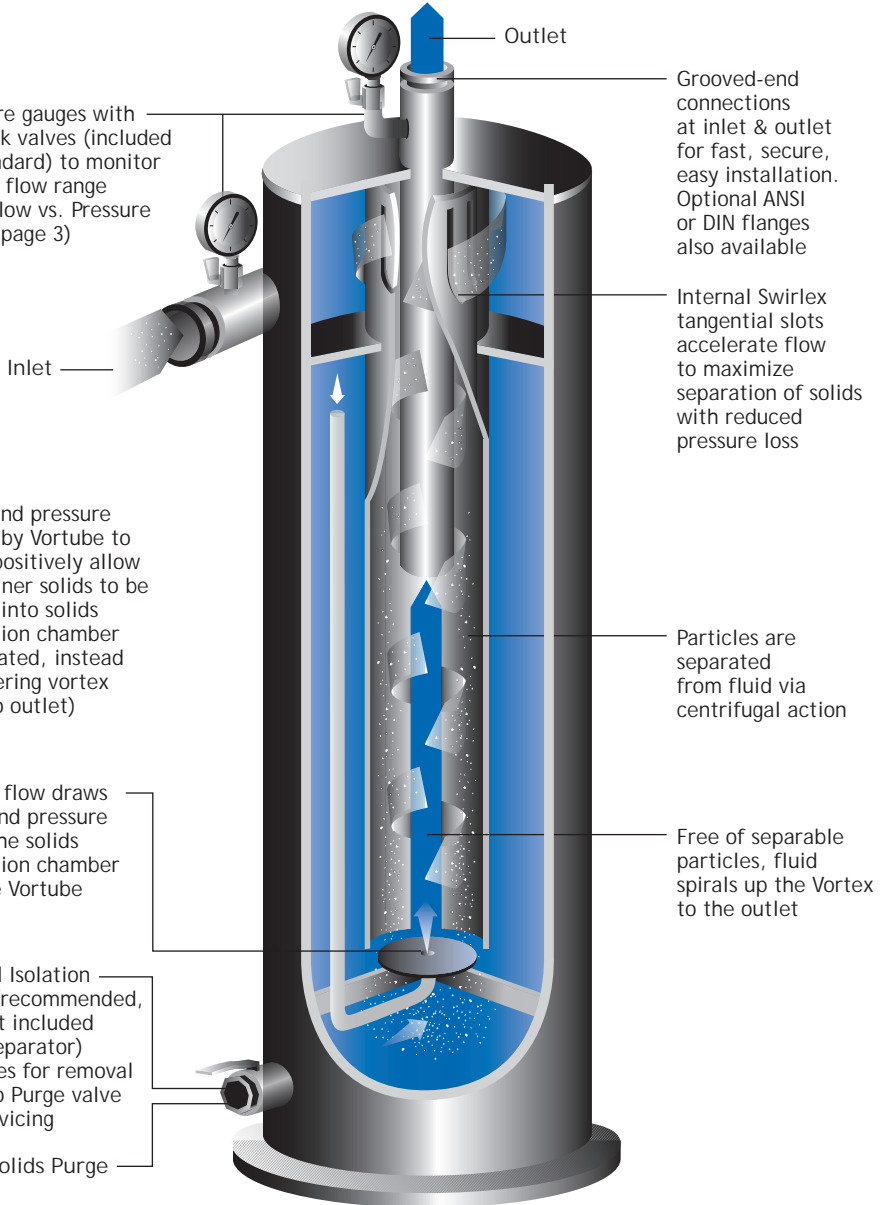

Performance

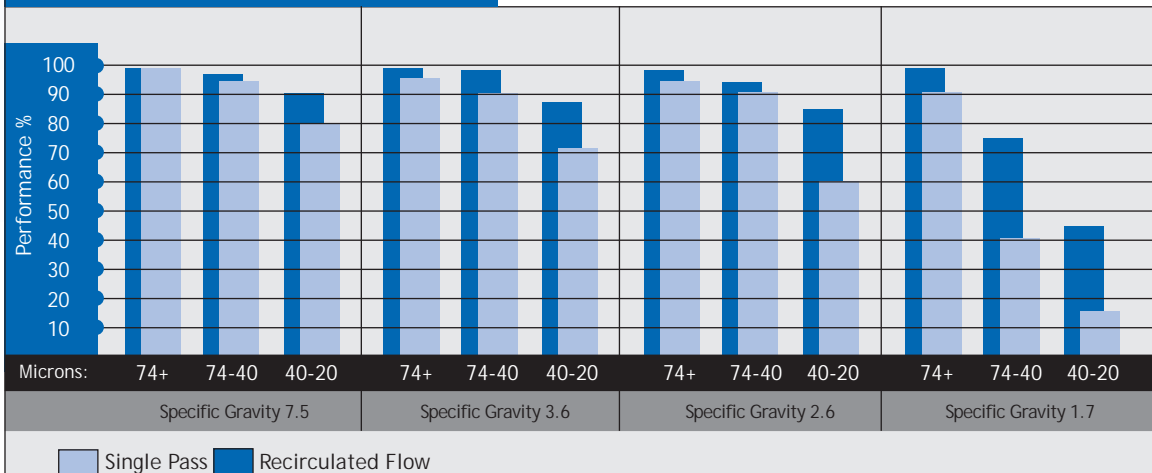

Legend: Single Pass (light blue), Recirculated Flow (dark blue)

Specifications

| Model* | Flow Range | | Inlet/Outlet Grooved Coupling** | Purge Size Male N.P.T. | Collection Chamber Capacity | | Weight Empty | | Weight with Water | |
|------------|------------|--------------------|---------------------------------|------------------------|-----------------------------|--------|--------------|--------|-------------------|--------|
| | U.S. gpm | m ³ /hr | | | gal | liters | lbs. | kg | lbs | kg |
| JPL-0004 | 4-10 | 1-2.5 | 1/2" NPT** | 1" | 0.09 | 0.3 | 23 | 10.4 | 29 | 13.2 |
| JPL-0010 | 10-20 | 2.5-4.5 | 3/4" NPT** | 1" | 0.11 | 0.4 | 37 | 16.8 | 47 | 21.3 |
| JPL-0016 | 16-30 | 4 -7 | 1" | 1" | 0.15 | 0.6 | 42 | 19.1 | 53 | 24 |
| JPL-0028 | 28-45 | 7-10 | 1-1/4" | 1-1/2" | 0.27 | 1.0 | 62 | 28.1 | 80 | 36.3 |
| JPL-0038 | 38-65 | 9-15 | 1-1/2" | 1-1/2" | 0.4 | 1.5 | 85 | 38.6 | 115 | 52.2 |
| JPL-0060 | 60-100 | 14-23 | 2" | 1-1/2" | 0.8 | 3.0 | 147 | 66.7 | 218 | 98.9 |
| JPL-0085 | 85-145 | 19-33 | 2-1/2" | 1-1/2" | 0.8 | 3.0 | 188 | 85.3 | 272 | 123.4 |
| JPL-0130 | 130-225 | 30-51 | 3" | 1-1/2" | 0.8 | 3.0 | 200 | 90.7 | 288 | 130.6 |
| JPL-0200-L | 200-325 | 45-74 | 4" | 1-1/2" | 1.6 | 6.1 | 431 | 195.5 | 617 | 279.9 |
| JPL-0200-V | | | | | 4.4 | 16.7 | 268 | 166.9 | 582 | 264.0 |
| JPL-0285-L | 285-525 | 65-120 | 4" | 1-1/2" | 2.1 | 7.9 | 559 | 253.6 | 869 | 394.2 |
| JPL-0285-V | | | | | 5.4 | 20.5 | 468 | 212.3 | 752 | 341.1 |
| JPL-0450-L | 450-825 | 102-190 | 6" | 1-1/2" | 2.8 | 10.6 | 731 | 331.6 | 1195 | 542.0 |
| JPL-0450-V | | | | | 6.7 | 25.4 | 655 | 297.1 | 1090 | 494.4 |
| JPL-0650-L | 650-1200 | 150-275 | 6" | 1-1/2" | 4.3 | 16.3 | 924 | 419.1 | 1622 | 735.7 |
| JPL-0650-V | | | | | 10.4 | 39.4 | 880 | 399.2 | 1536 | 696.7 |
| JPL-1160-L | 1160-2150 | 265-490 | 8" | 1-1/2" | 8.6 | 32.6 | 1309 | 593.7 | 2634 | 1194.8 |
| JPL-1160-V | | | | | 20.5 | 77.6 | 1304 | 591.5 | 2558 | 1160.3 |
| JPL-1850-L | 1850-3400 | 420-775 | 10" | 2" | 15.0 | 56.8 | 1732 | 785.6 | 3874 | 1757.2 |
| JPL-1850-V | | | | | 31.5 | 119.2 | 1829 | 829.6 | 3843 | 1743.1 |
| JPL-2650-L | 2650-4900 | 600-1115 | 12" | 2" | 23.5 | 89.0 | 3023 | 1371.2 | 7025 | 3186.5 |
| JPL-2650-V | | | | | 51.1 | 193.4 | 2788 | 1264.6 | 5821 | 2640.3 |
| JPL-4200-L | 4200-7800 | 950-1775 | 16" | 3" | 52.2 | 197.6 | 5414 | 2455.7 | 12131 | 5502.5 |
| JPL-4200-V | | | | | 99.3 | 375.9 | 5516 | 2502.0 | 11886 | 5391.4 |
| JPL-6700-L | 6700-12750 | 1520-2895 | 20" | 3" | 81.0 | 306.6 | 7480 | 2292.9 | 18332 | 8315.2 |
| JPL-6700-V | | | | | 162.3 | 614.4 | 7733 | 3507.6 | 18061 | 8192.3 |

* Models ending with "L" are low profile, "V" for vertical profile. No suffix indicates low-flow vertical profile

** Inlet/Outlet may also be specified with ANSI or DIN flanges; other models also available with optional threading

Maximum pressure rating: 150 psi (10.3 bar); consult factory for higher pressure requirements

Maximum temperature rating: 180°F (82.2°C) Consult factory for higher temperatures

Pressure loss range: 3 - 12 psi (.2-.8 bar)

Maximum particle size: JPL-0016 and smaller - .25 inch (6 mm); all other models - .375 inch (9 mm)


Material (standard carbon steel): Domes - A 285C/516 GR70, .25 inch (6 mm) minimum thickness

Other parts - A-36, A-53B or other quality grade, .25 inch (6 mm) minimum thickness; special coatings

and other materials available - consult factory

Paint coating: Acrylic urethane, spray-on royal blue

Flow vs. Pressure Loss

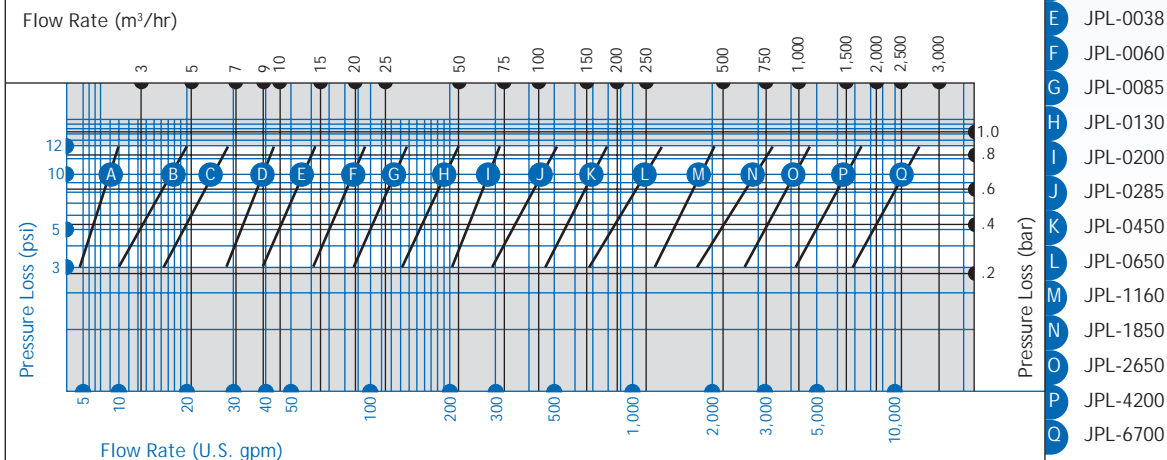

- A JPL-0004
- B JPL-0010
- C JPL-0016
- D JPL-0028
- E JPL-0038
- F JPL-0060
- G JPL-0085
- H JPL-0130
- I JPL-0200
- J JPL-0285
- K JPL-0450
- L JPL-0650
- M JPL-1160
- N JPL-1850
- O JPL-2650
- P JPL-4200
- Q JPL-6700


Installation Instructions

Maintenance/Purging


1. LAKOS JPL Separators must be purged regularly to remove the separated solids from the temporary collection chamber.
2. All purge hardware should be installed prior to any elbows or turns in the purge piping. Avoid "uphill" purging, which can clog purge piping and hinder effective solids evacuation.
3. For best results, purging is recommended while the LAKOS Separator is in operation, utilizing system pressure to enhance solids evacuation.
4. LAKOS provides a full selection of rugged, durable automatic purging and solids-handling systems to optimize the performance of your separation system. CAUTION: Economy-type valves typically fail prematurely in the harsh/abrasive environment of solids purging.
5. Be sure to install the manual isolation valve (provided as standard) prior to the automatic valve (available from LAKOS at additional cost) in order to facilitate servicing of the automatic valve without system shutdown.

- 1 LAKOS JPL Separators are shipped on skids or in wooden crates. Support legs (when applicable) are detached for shipping. A large ring, located on the unit's side or upper chamber, is provided for hoisting as necessary.
- 2 A suitable foundation is necessary to accommodate the LAKOS Separator's weight including liquid (see data, page 3). Anchor bolts are recommended in the base of the legs (low profile) or skirt (vertical profile).
- 3 Prior to installation, inspect the inlet/outlet/purge connections for foreign objects incurred during shipping/storage.
- 4 Inlet/outlet pipe connections to the LAKOS Separator should be a straight run of at least five pipe diameters to minimize turbulence and enhance performance. Separators should not support piping.
- 5 Proper purge hardware and/or solids-handling equipment is required to flush separated solids from the separator (see details, page 2).
- 6 All LAKOS Separators operate within a prescribed flow range (see data, page 3). Pipe size is not a factor in model selection. Use appropriate hardware to match the inlet/outlet size. Grooved couplings are not included with the separator. Optional flanged connections are available upon request.
- 7 Inlet pressure to the LAKOS Separator must be at least equal to or greater than the anticipated pressure loss through the separator (see pressure loss chart, page 3) plus 15 psi (1 bar) plus whatever downstream pressure is required.
- 8 Pressure gauges (provided as standard, with petcock valves) are required at both the inlet and outlet of the separator in order to monitor pressure loss and proper system flow (see "Flow vs. Pressure Loss" chart, page 3). If separator operates with an open discharge, a valve should be installed to create a back pressure of at least 5 psi (.3 bar).
- 9 Winterizing is important if the LAKOS Separator is to remain idle in freezing temperatures. Drain liquid as necessary to avoid expansion of water to ice and related damages.
- 10 See I & O Manual for additional information of standard units.

Low Flow Rates

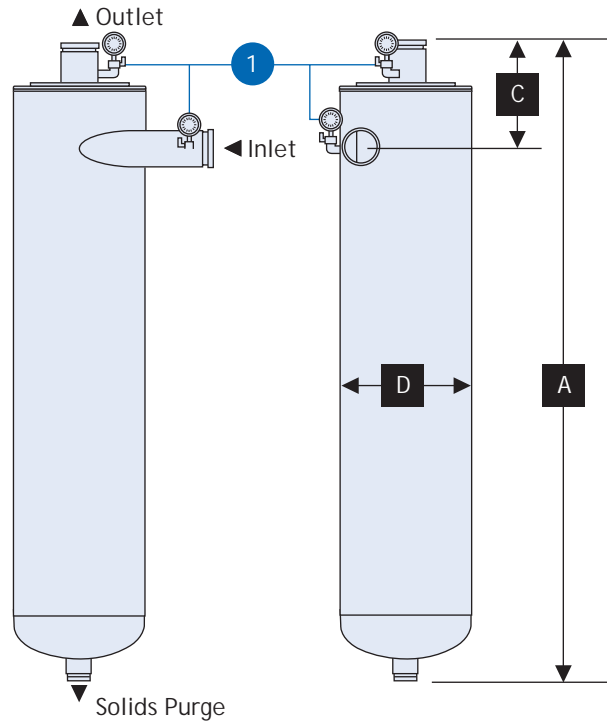

Top View



Dimensions

| Model | A | | B | | C | | D | |
|----------|----------|------|---------|-----|---------|-----|--------|-----|
| | in | mm | in | mm | in | mm | in | mm |
| JPL-0004 | 27-9/16 | 700 | 6-3/4 | 171 | 7-5/8 | 194 | 3-1/2 | 89 |
| JPL-0010 | 31-13/16 | 808 | 8-1/4 | 210 | 7-5/8 | 194 | 4-1/2 | 114 |
| JPL-0016 | 33-1/8 | 841 | 8-1/4 | 210 | 7-15/16 | 202 | 4-1/2 | 114 |
| JPL-0028 | 36-15/16 | 938 | 9-13/16 | 249 | 8-1/16 | 205 | 5-9/16 | 141 |
| JPL-0038 | 39-1/2 | 1003 | 10-5/16 | 262 | 8-1/8 | 206 | 6-5/8 | 168 |
| JPL-0060 | 48-13/16 | 1240 | 13-5/16 | 338 | 8-7/8 | 225 | 8-5/8 | 219 |
| JPL-0085 | 56-5/8 | 1438 | 13-5/16 | 338 | 9-5/8 | 244 | 8-5/8 | 219 |
| JPL-0130 | 59-3/4 | 1518 | 13-5/16 | 338 | 10-1/2 | 267 | 8-5/8 | 219 |

Inlet/Outlet Pressure Gauges with Petcock Valves

Included as standard; Install at both inlet and outlet for proper flow verification (see "Flow vs. Pressure Loss", page 3)

Note: These units may also be specified with optional support skirt or legs. Consult factory for details.

*Dimensions for reference only.
Consult factory when pre-plumbing.*

Low Profile

High Flow Rates

1 Inlet/Outlet Pressure Gauges with Petcock Valves

Included as standard; Install at both inlet and outlet for proper flow verification (see "Flow vs. Pressure Loss", page 3)

2 Inspection/Drain Plug



1/2-inch NPT female; provides access to upper chamber for inspection of slot area; also allows for draining the upper chamber if necessary

3 Hand-Hole Inspection Port

Provides access to collection chamber

4 Lifting Ring

For installation purposes

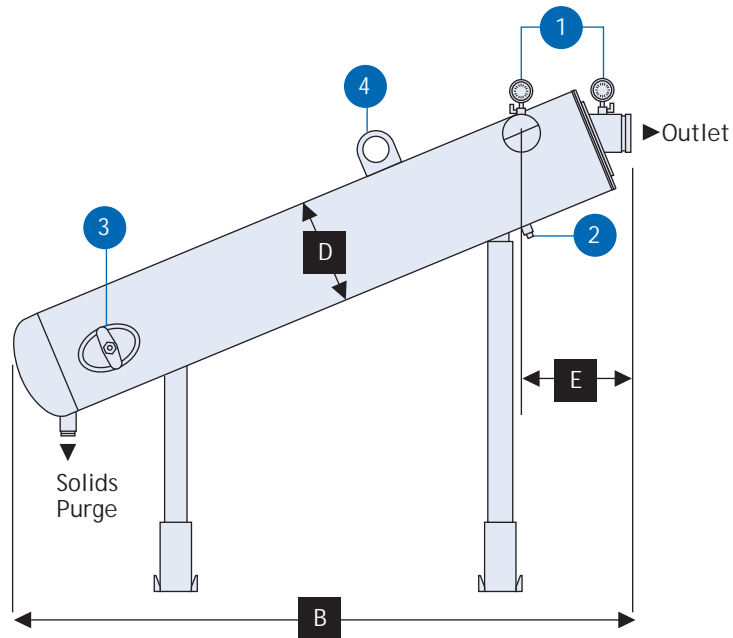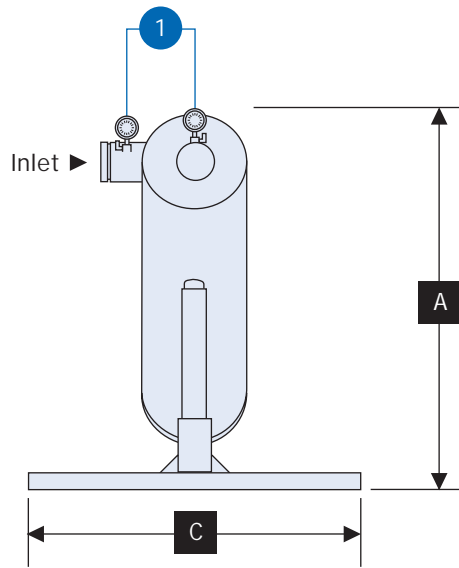


Dimensions

| Model | A | | B | | C | | D | | E | |
|------------|----------|------|---------|------|----|------|--------|------|----------|------|
| | in | mm | in | mm | in | mm | in | mm | in | mm |
| JPL-0200-L | 68-7/8 | 1749 | 65-1/2 | 1664 | 40 | 1016 | 10-3/4 | 273 | 13-1/4 | 337 |
| JPL-0285-L | 76-1/2 | 1943 | 79-3/4 | 2026 | 40 | 1016 | 12-3/4 | 324 | 15-7/8 | 403 |
| JPL-0450-L | 83-3/8 | 2118 | 94-1/2 | 2400 | 40 | 1016 | 14 | 356 | 15-1/4 | 387 |
| JPL-0650-L | 89-7/8 | 2283 | 106-1/4 | 2699 | 40 | 1016 | 16 | 406 | 17-7/8 | 454 |
| JPL-1160-L | 101-5/16 | 2573 | 127-1/4 | 3232 | 40 | 1016 | 20 | 508 | 21-13/16 | 554 |
| JPL-1850-L | 110 | 2794 | 142-3/8 | 3616 | 40 | 1016 | 24 | 610 | 25-15/16 | 659 |
| JPL-2650-L | 122-7/8 | 3121 | 157-1/2 | 4001 | 60 | 1524 | 28 | 711 | 28-3/16 | 716 |
| JPL-4200-L | 144-3/4 | 3677 | 197-1/2 | 5017 | 60 | 1524 | 36 | 914 | 37-1/8 | 943 |
| JPL-6700-L | 163-1/2 | 4153 | 233-5/8 | 5934 | 60 | 1524 | 42 | 1067 | 42-5/8 | 1083 |



Dimensions for reference only. Consult factory when pre-plumbing.

High Flow Rates

Vertical Profile

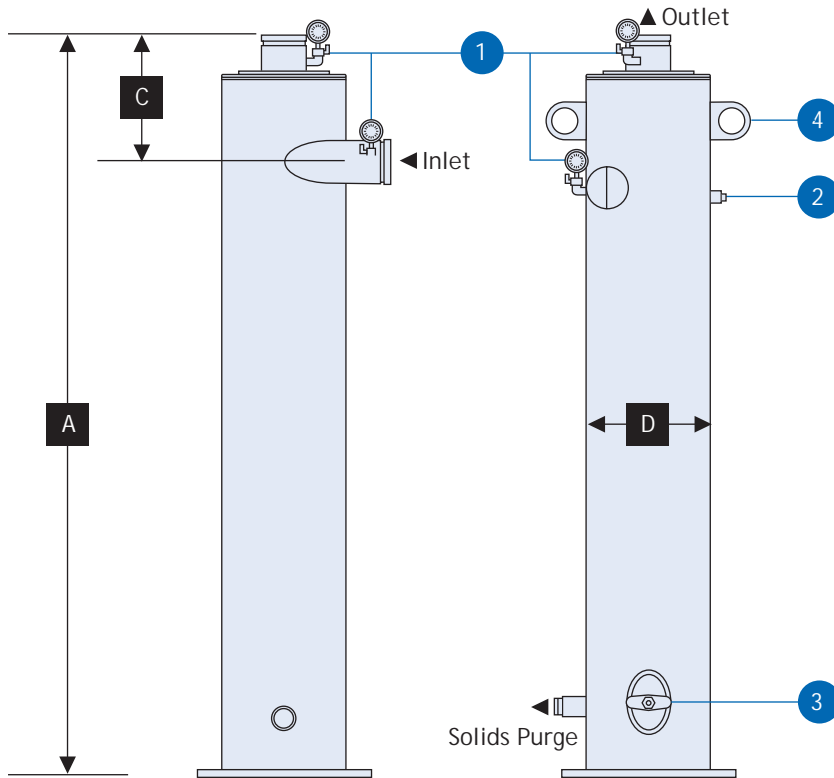

- 1 Inlet/Outlet Pressure Gauges with Petcock Valves
Included as standard; Install at both inlet and outlet for proper flow verification (see "Flow vs. Pressure Loss", page 3)
- 2 Inspection/Drain Plug
1/2-inch NPT female; provides access to upper chamber for inspection of slot area; also allows for draining the upper chamber if necessary
- 3 Hand-Hole Inspection Port
Provides access to collection chamber
- 4 Lifting Rings
For installation purposes

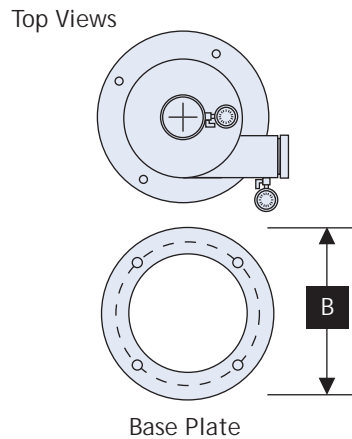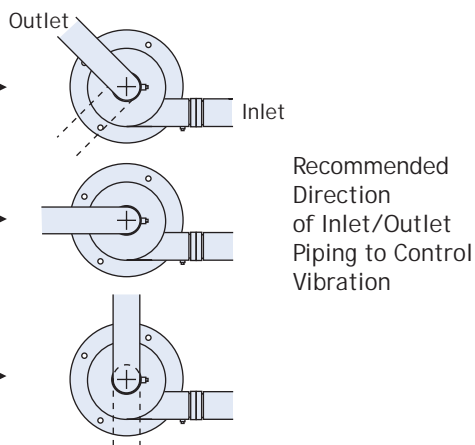

Dimensions

| Model | A | | B | | C | | D | |
|------------|----------|------|----|------|---------|-----|--------|------|
| | in | mm | in | mm | in | mm | in | mm |
| JPL-0200-V | 74-1/6 | 1881 | 16 | 406 | 11-3/4 | 298 | 10-3/4 | 273 |
| JPL-0285-V | 79-13/16 | 2027 | 18 | 457 | 14-3/16 | 360 | 12-3/4 | 324 |
| JPL-0450-V | 94-7/8 | 2410 | 20 | 508 | 13-3/8 | 340 | 14 | 356 |
| JPL-0650-V | 107-3/8 | 2727 | 22 | 559 | 15-3/4 | 400 | 16 | 406 |
| JPL-1160-V | 128-1/8 | 3254 | 26 | 660 | 18-7/8 | 479 | 20 | 508 |
| JPL-1850-V | 141-1/4 | 3588 | 32 | 813 | 20-7/8 | 530 | 24 | 610 |
| JPL-2650-V | 156-1/4 | 3969 | 36 | 914 | 22-3/4 | 578 | 28 | 711 |
| JPL-4200-V | 195-5/16 | 4961 | 44 | 1118 | 29-1/8 | 740 | 36 | 914 |
| JPL-6700-V | 229-7/16 | 5828 | 48 | 1219 | 31-5/8 | 803 | 42 | 1067 |

Dimensions for reference only. Consult factory when pre-plumbing.

Sample Specifications

Sample specifications can be downloaded from the LAKOS website at www.LAKOS.com.

Limited Warranty

All products manufactured and marketed by this corporation are warranted to be free of defects in material or workmanship for a period of at least one year from date of delivery. Extended warranty coverage applies as follows:

All LAKOS Separators: Five year warranty

All other components: 12 months from date of installation; if installed 6 months or more after ship date, warranty shall be a maximum of 18 months from ship date.

If a fault develops, notify us, giving a complete description of the alleged malfunction. Include the model number(s), date of delivery and operating conditions of subject product(s). We will subsequently review this information and, at our option, supply you with either servicing data or shipping instruction and returned materials authorization. Upon prepaid receipt of subject product(s) at the instructed destination, we will then either repair or replace such product(s), at our option, and if determined to be a warranted defect, we will perform such necessary product repairs or replace such product(s) at our expense.

This limited warranty does not cover any products, damages or injuries resulting from misuse, neglect, normal expected wear, chemically-caused corrosion, improper installation or operation contrary to factory recommendation. Nor does it cover equipment that has been modified, tampered with or altered without authorization.

No other extended liabilities are stated or implied and this warranty in no event covers incidental or consequential damages, injuries or costs resulting from any such defective product(s).



Two-Stage Separators

Effectively handles higher solids concentrations.
Improves fine particle removal performance.

Combining LAKOS Separators in a "Super Separator" configuration, the first-stage separator will always most effectively remove larger solids, which are easily influenced by centrifugal action. Often, it is the larger solids that make up a great percentage of the overall solids volume. When finer, yet separable solids are also present and larger solids have limited the space available on the perimeter of the separation barrel, the second-stage separator then performs to remove even more of the finer solids.

Essentially, removing the larger solids in the first-stage separator effectively reduces the overall solids concentration, allowing the second-stage separator to more easily handle the lower solids concentration and the smaller particles. And, in applications where the particle geometry is flakes, rods and/or irregular shapes, two-stage separators have been utilized to successfully increase overall particle-removal.

JPL Low Profile

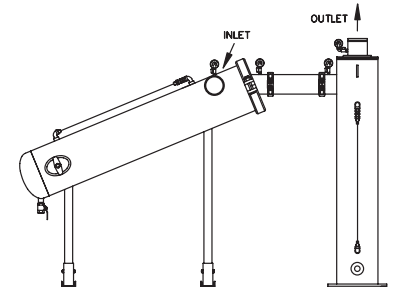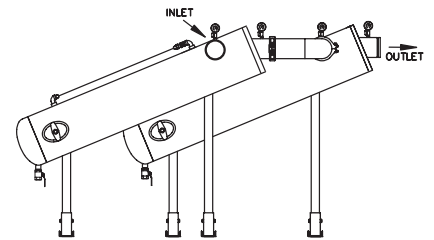

JPX Low Profile with
JPL Vertical Profile

1365 North Clovis Avenue
Fresno, California 93727 USA
Telephone: (559) 255-1601
FAX: (559) 255-8093
Toll Free: (800) 344-7205
(USA, Mexico & Canada)
Internet: www.lakos.com
E-mail: info@lakos.com

 Printed on recycled paper LS-631F (Rev.11/07)